

Lattice Boltzmann Models of Charged Multiphase Flows

Marco Lauricella¹, Simone Melchionna^{*2}, Dario Pisignano^{3,4}, and Sauro Succi^{1,5}

¹Istituto per le Applicazioni del Calcolo CNR, Via dei Taurini 19, I-00185 Rome, Italy

²Istituto dei Sistemi Complessi CNR, Consiglio Nazionale delle Ricerche, Dipartimento di Fisica, University of Rome La Sapienza, P.le A. Moro 2, I-00185 Rome, Italy.

³Dipartimento di Matematica e Fisica Ennio De Giorgi, University of Salento, via Arnesano, I-73100 Lecce, Italy

⁴NEST, Istituto Nanoscienze-CNR, Piazza S. Silvestro 12, I-56127 Pisa, Italy.

⁵Harvard Institute for Applied Computational Science, Cambridge, Massachusetts, United States

Friday 16th December, 2016

Abstract

We present a Shan-Chen model for charged multiphase fluids and provide exploratory simulations of charged droplets at rest and under a constant electric field. We also provide preliminary results for charged jet formation under electrospinning-like conditions.

1 Introduction

The dynamics of charged jets presents a major interest, both as an outstanding problem in non-equilibrium thermodynamics, as well as for its numerous applications in science and engineering [1, 2, 3]. In particular, the recent years have witnessed a surge of interest towards the manufacturing of electrospun nanofibers, mostly on account of their prospective applications, such as tissue engineering, air and water filtration, optoelectronics, drug delivery and regenerative medicine. As a consequence, several experimental studies have focused on the characterization and production of one-dimensional elongated nanostructures [4, 5, 6, 7, 8]. Electrospun nanofibers are typically produced at laboratory scale via the uniaxial stretching of a jet, which is ejected at a nozzle from an electrified charged polymer solution. The charged jet elongates under the effect of an external electrostatic field applied between the spinneret and a conductive collector and eventually undergoes electromechanical (e.g., whipping) instabilities due to various sources of disturbance, such as mechanical vibrations at the spinneret, hydrodynamic friction with the surrounding fluid and others. While such instabilities can be detrimental in some respect, making an accurate position of individual fibers on target substrates very hard, in other experiments they are sought for, since they result in thinner cross sections, hence finer electrospun fibres, as they hit the collector. This follows from a plain argument of mass conservation: whipping instabilities generate longer jets, hence thinner cross sections [11].

The computational modelling of the electrospinning process is based on two main families of techniques: particle methods and Lagrangian fluid methods. The former is based on the representation of the polymer jet as a discrete collection of discrete particles (beads) connected via elastic springs with frictional coupling (dissipative dashpots) and interacting via long-range Coulomb electrostatics [12, 13, 14, 15]. The latter, on the other hand, describe the jet as a continuum media, obeying the Navier-Stokes equations for a charged fluid in Lagrangian form [16]. Both methods are grid-free, hence well suited to describe abrupt changes of the jet morphology without taxing the grid resolution, as it is the case for Eulerian grid methods. In this respect, grid-based methods, such as Lattice Boltzmann, are not expected to offer a competitive alternative to the two aforementioned class of methods. Nevertheless, owing to its efficiency, especially on parallel computers, and its flexibility towards the inclusion of physical effects beyond single-phase hydrodynamics, it appears worth exploring the possibility of using Lattice Boltzmann also in the framework of electrospinning. The present work reports a preliminary step along this direction.

The paper is organised as follows. In section II we present the basic features of the Lattice Boltzmann extension to the case of charged multiphase fluids. In sections III, we present results for the case of charged multiphase fluids at rest, and we report on preliminary results for charged multiphase jets under conditions related to electrospinning experiments.

^{*}Electronic address: simone.melchionna@roma1.infn.it; Corresponding author

2 Model

We consider a single-specie, charged fluid as composed of point-like particles and neglect correlations stemming from excluded volume interactions. We also consider the fluid to be immersed in a charged uniform background of opposite charge, so to realize a globally electroneutral system.

Following Boltzmann's description, the state of each fluid species is determined by the distribution function $f_p(\vec{r}, t)$ being the probability of finding at time t the fluid at position $\vec{r}$ and moving with discrete velocity $\vec{c}_p$. The latter are also viewed as vectors connecting a lattice site $\vec{r}$ to its lattice neighbors. The macroscopic variables are given by the density $\rho = \sum_p f_p$ and the fluid velocity $\vec{u} = 1/\rho \sum_p \vec{c}_p f_p$. In the following, we refer to lattice units where the mesh spacing and timestep are conveniently set to unity. Also, we adopt the so-called D3Q19 scheme, composed by 18 discrete speeds (connecting first and second lattice neighbors) and one extra null vectors accounting for particles at rest. In this scheme, c is the speed of sound that in lattice units is equal to $1/\sqrt{3}$. At the same time, we consider a unit fluid molecular mass, so that the thermal energy is equal to $k_B T = c^2$.

The fluid carries a charge q , so that $q\rho$ is the charge density. In addition, it is subjected to internal thermodynamic forces that promote phase separation. The electrostatic potential ϕ generated by the charge distribution $q\rho$ obeys Poisson equation for electrostatics, $\nabla^2 \phi = -\frac{q\rho}{\epsilon_o}$, where ϵ_o is the medium dielectric permittivity. The equation can be rewritten by using the dimensionless potential $\tilde{\phi} = e\phi/k_B T$, so that

$$\nabla^2 \tilde{\phi} = -4\pi l_B \rho \quad (1)$$

where l_B is the Bjerrum length $l_B = e/4\pi\epsilon k_B T$. In addition, at the boundary we impose Neumann boundary conditions. For insulating and uncharged walls, these read

$$-\vec{\nabla} \tilde{\phi} \cdot \hat{n} = 0 \quad (2)$$

where $\hat{n}$ is the unit vector normal to the confining surface. The fluid is then subjected to the internal electrostatic force $\vec{F}_{int}^{el} = -k_B T \nabla \tilde{\phi}$ and is also subjected to the external electric force, reading $\vec{F}_{ext}^{el} = q\vec{E}_{ext}^{el}$. We determine the electric potential by solving numerically the three-dimensional Poisson equation by means of a SOR (Successive Over-Relaxation) algorithm and Chebyshev acceleration, a method that has asymptotic rate of convergence larger than that of the simple SOR method [9].

Phase separation forces are accounted for by means of the Shan-Chen method. We construct the local force as

$$\vec{F}^{SC}(\vec{r}, t) = - \left[G \sum_{p \in fluid} w_p \psi(\rho(\vec{r} + \vec{c}_p, t)) \vec{c}_p + G_w \sum_{p \in wall} w_p \vec{c}_p \right] \psi(\rho(\vec{r}, t)) \quad (3)$$

with the sum $\sum_{p \in fluid}$ running over lattice nodes where the fluid is allowed, that is, not belonging to the wall, and $\sum_{p \in wall}$ runs over nodes belonging to the wall. G and G_w are fluid-fluid and fluid-wall interaction strengths, respectively. In addition,

$$\psi(\rho) = \psi_0 e^{-\rho_0/\rho} \quad (4)$$

where ψ_0 and ρ_0 are arbitrary constants.

The LB evolution equation reads

$$f_p(\vec{r} + \vec{c}_p, t + 1) = f_p(\vec{r}, t) + \omega(f_p^{eq}(\rho, \vec{u}) - f_p) + g_p \quad (5)$$

where f_p^{eq} is the local quasi-equilibrium,

$$f_p^{eq} = w_p \rho \left[1 + \frac{\vec{u} \cdot \vec{c}_p}{c^2} + \frac{(\vec{u} \cdot \vec{c}_p)^2 - c^2 u^2}{2c^4} \right] \quad (6)$$

The effect of forces is accounted for by the term g_p being the sum of all internal and external forces, $\vec{F} = \vec{F}_{int}^{el} + \vec{F}_{ext}^{el} + \vec{F}^{SC}$, and reading

$$g_p = \rho w_p \left[\frac{\vec{F} \cdot \vec{c}_p}{c^2} + \frac{(\vec{F} \cdot \vec{c}_p)(\vec{u} \cdot \vec{c}_p) - c^2 \vec{F} \cdot \vec{u}}{c^4} \right] \quad (7)$$

In bulk conditions, the LB method is intrinsically second-order accurate in space and time, and, in order to ensure the same accuracy in presence of forces, the local velocity is modified according to [10]

$$\vec{u} = 1/\rho \sum_p f_p(\vec{r}, t) \vec{c}_p + \frac{1}{2} \vec{F} \quad (8)$$

3 Numerical results

3.1 Charged drop at rest

In order to assess the properties of our implementation for charged multiphase systems, we have initially run a set of simulations modeling a charged component system obeying the Shan-Chen equation of state. In order to assess the static behavior, we take a periodic mesh made of $480 \times 480 \times 2$ nodes, that is, a *de facto* two-dimensional system, and prepare the system by creating a circular drop of density $\rho = 460$ lattice units (l.u.), immersed in the second background phase at lower density $\rho_b = 60$ l.u.. Further, the strength of non-ideal interactions was set equal to $G = -120$, $G/G_{crit}^o = 1.28$ where G_{crit}^o is the critical Shan-Chen coupling in the absence of electric fields, while the charge density ρ_c was taken linearly dependent on density ρ by constant $q = 10^{-5}$. A suited quantity of a second fluid with constant $q = -10^{-5}$ was uniformly added to the system in order to counterbalance the positive charge of the first fluid and obtain a system with net charge zero. All simulations were performed with the MUPHY software [17], developed to simulate multi-scale systems composed by multicomponent fluids, particles and generic ODEs.

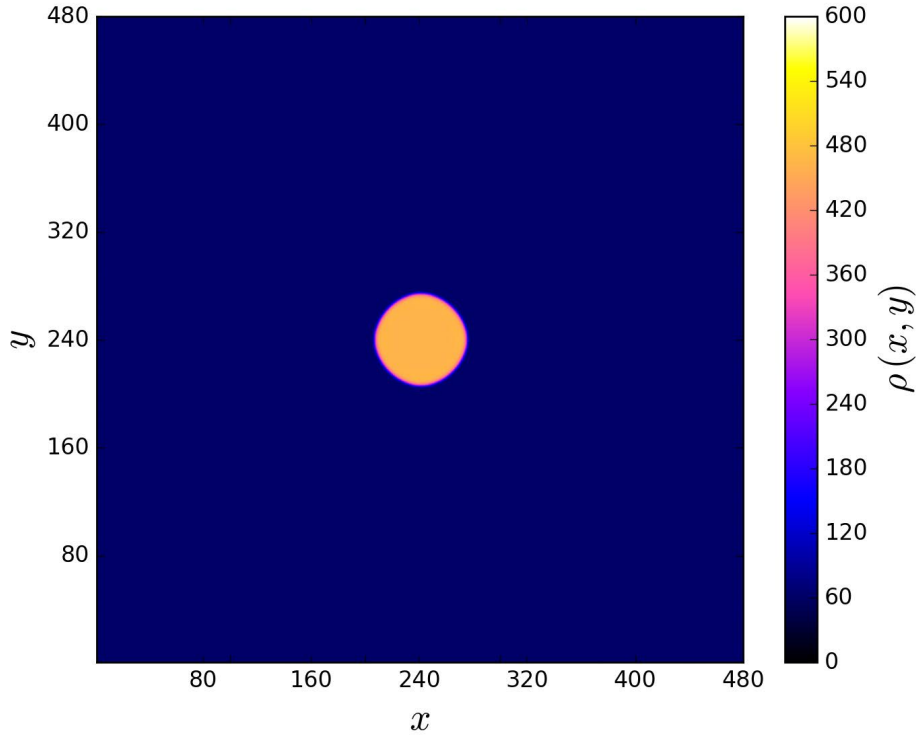


Figure 1: Density distribution for the charged drop at rest.

The stationary configuration of the described system is reported in Fig. 1. Further, we also report the electrostatic potential and the electric field in Fig. 2. Here, we observe the clear presence of the electric field generated by the charge distribution. In particular, at the frontier of the drop the magnitude of the (adimensional) electric field is equal to 3.8 l.u.. This provides a further view on the balance of forces acting at the interface, including Shan-Chen pressure and capillary and electrostatic forces, the latter pointing normal to the interface.

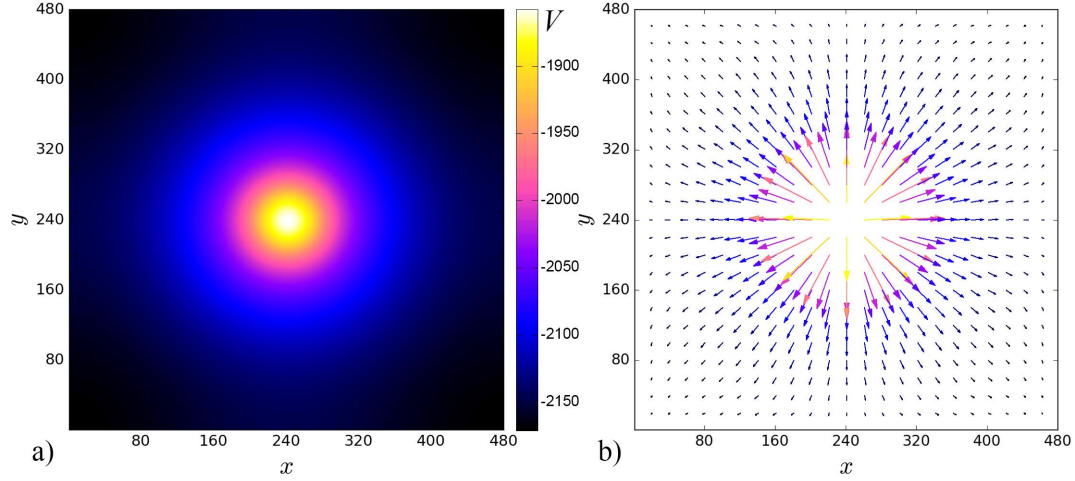


Figure 2: Profile of the electrostatic potential (left) and electric field (right panel). Both quantities refer to the charged drop at rest.

It is of interest to estimate the various forces which concur to provide a stable configuration of the droplet. The mechanical balance reads as follows:

$$p_L + p_{el} = p_V + p_{cap} \quad (9)$$

where p_L and p_V are the liquid and vapour pressure, respectively, $p_{cap} = \gamma/R$ is the capillary pressure and p_{el} is the repulsive electrostatic pressure. The latter can be estimated by standard considerations in electrostatics, namely:

$$p_{el} = \frac{\epsilon_o E_{el}^2}{2} = \frac{q^2 \rho_L^2 R^2}{8\epsilon_o} \quad (10)$$

where ρ_L is the liquid density, which can be safely assumed to be constant.

$$\frac{p_{el}}{p_{cap}} = \frac{q^2 \rho_L^2 R^3}{8\epsilon_o \gamma} \quad (11)$$

In actual numbers, this ratio is equal to 1/40.

This shows that electrostatic forces act as a small perturbation on top of the neutral multiphase physics.

3.2 Charged drop under a constant external field

Next, we investigate the effects of an uniform external electric field of magnitude equal to 10 l.u., and pointing along the x axis. Using the previous configuration at the equilibrium as starting point of our simulation, we report a series of snapshots density taken at different timesteps. The set in Fig. 3 highlight the evident motion of the charged drop towards right in accordance with the direction of the electric field. From the figure, it is manifest the clear change in the drop shape, which is affected by the velocity field surrounding the liquid phase.

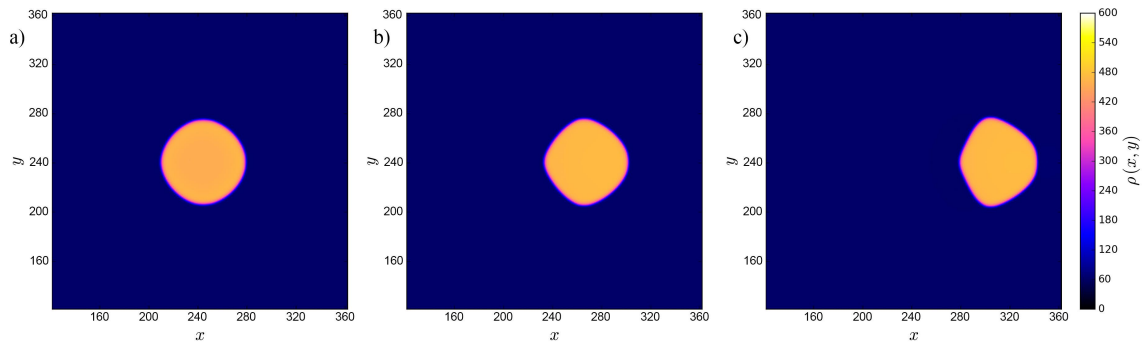


Figure 3: A series of snapshots of density ρ for a charged drop under an external electric field of magnitude 10 l.u. taken at times 250, 750 and 1250 l.u.

In order to highlight the latter effect we report in Fig. 4 the line integral convolution (LIC) visualization technique [18], highlighting the fine details of the flow field. In Fig. 4 we also report the magnitude of the fluid velocity field, from which it is apparent that the highest values are located on the right side of the drop surface.

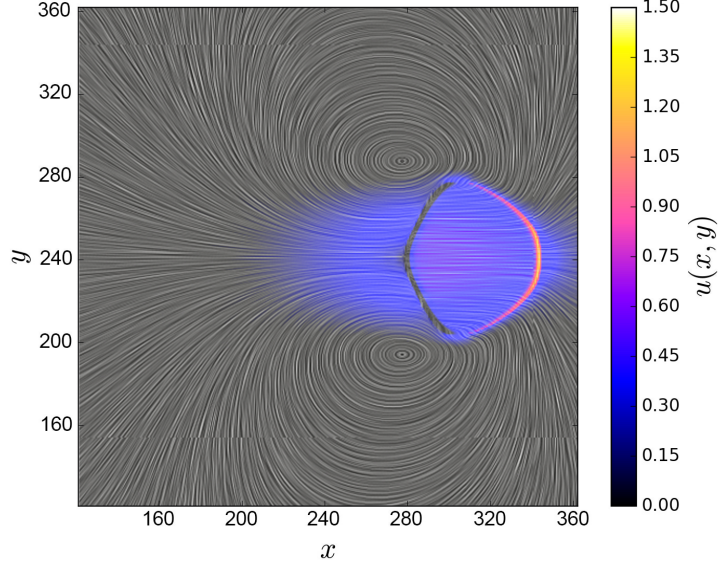


Figure 4: LIC representation and magnitude of the velocity field for the charged drop at timestep 1250 under the action of the external electric field.

Once again, it is instructive to assess the strength of the electrostatic field in units of capillary forces, namely:

$$\tilde{E} \equiv \frac{q\rho_L\pi R^2 E_{ext}}{2\pi R} \frac{R}{\gamma} = \frac{q\rho_L R^2 E_{ext}}{2\gamma} \quad (12)$$

In actual numbers, this ratio is equal to $3/2$.

This shows that the electric drive is sufficiently large to drive a net motion of the droplet providing an alteration of its shape.

3.3 Charged multiphase jet in electrospinning setup

We set up a system modeling the electrospinning process, containing a charged Shan-Chen component. The system is a mesh made of $480 \times 480 \times 2$ nodes. The system geometry presents, on the left side, a nozzle of diameter $D = 60$ l.u. that reproduces the needle of the actual electrospinning apparatus where the charged fluid is injected. As a consequence, the system is remarkably open with the inlet nodes located inside (left side) the nozzle (at $x = 1$). Similarly, we set outlet nodes on the right side (at $x = 480$) where the jet will impinge under the effect of the external electric field. Such electric field is chosen to mimic the potential difference that is normally applied between the nozzle and a conductive collector in the real electrospinning setup. The computational setup is quite sensitive to the choice of the simulation parameters, and numerical stability has to be guaranteed by finely tuning the several parameters, in particular: the density and velocity of inlet and outlet nodes, the Shan-Chen coupling constants of fluid-fluid and fluid-wall interactions, the charge constant and the magnitude of the external electric field. After preliminary simulations, we obtain a good set of parameters that guarantee a stable and well-shaped charged jet ejected from the nozzle.

The initial density of the two phases are 460 and 62 for the liquid and gaseous phase, respectively. The initial configuration consists of the liquid phase filling the inner space of nozzle with a parabolic interface drawn just outside the needle (Fig. 5). All the remaining fluid nodes were prepared at gaseous density.

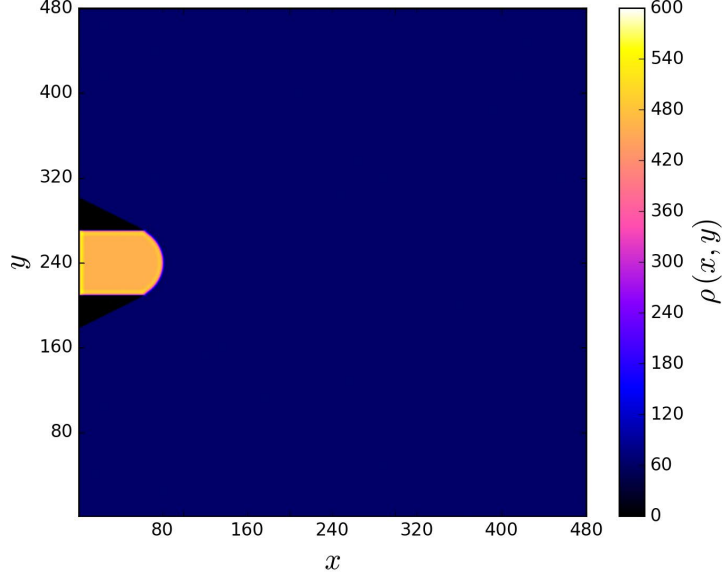


Figure 5: Density distribution of the electrospinning setup at initial time.

The Shan-Chen constant for the fluid-fluid interaction is set to $G = -120$, while the constant for the fluid-wall interaction was set to $G_w = -170$ only for the wall nodes located in the inner part of the nozzle, otherwise its value is zero. As in previous section, a suited quantity for the second fluid with constant $q = -10^{-5}$ was uniformly added to the system in order to obtain a system with net charge zero.

At the inlet and outlet nodes we define both the density and velocity of the first component. In particular at the outlet nodes (on the right edge) we set a density equal to 62 and a velocity of 0.01 l.u.. To better mimic the behavior of the jet inside the nozzle, the velocities applied at the inlet points are taken from a Poiseuille profile velocity, while the inlet density is set to 460. In particular, at each time step we compute the mean velocity of the fluid inside the nozzle, we used this value to set up a Poiseuille profile of a tube of length equal to 480 l.u.. As a consequence, the velocities at the inlet nodes are not fixed but can change during the simulation according to the actual mean velocity measured inside the nozzle.

The internal electric field computed by the Poisson solver (see Section 2) was computed on-the-fly during the simulation. In Fig. 6 we report the self-consistent electric potential, and the direction of the electric field at simulation time zero.

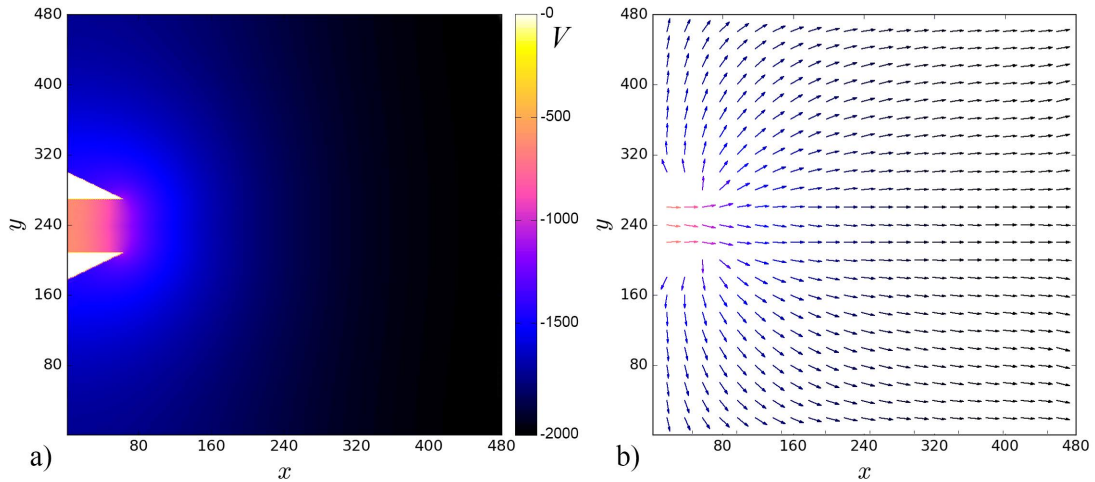


Figure 6: Profile of the electrostatic potential (left) and normalized vector field (right panel). Both quantities were computed at initial time.

We now report the result of this configuration in presence of an external electric field equal to 10.0 l.u.. In

particular, we observe the formation of a liquid charged jet which is ejected from the nozzle. In Fig. 7 we report a set of snapshots taken along the dynamics at several simulation time values. We observe the initial formation of the jet which shows a parabolic shape close to the nozzle. Also, we find a thinning of the jet that appears in qualitative agreement with the characteristic behavior of electrospun filaments as observed experimentally.

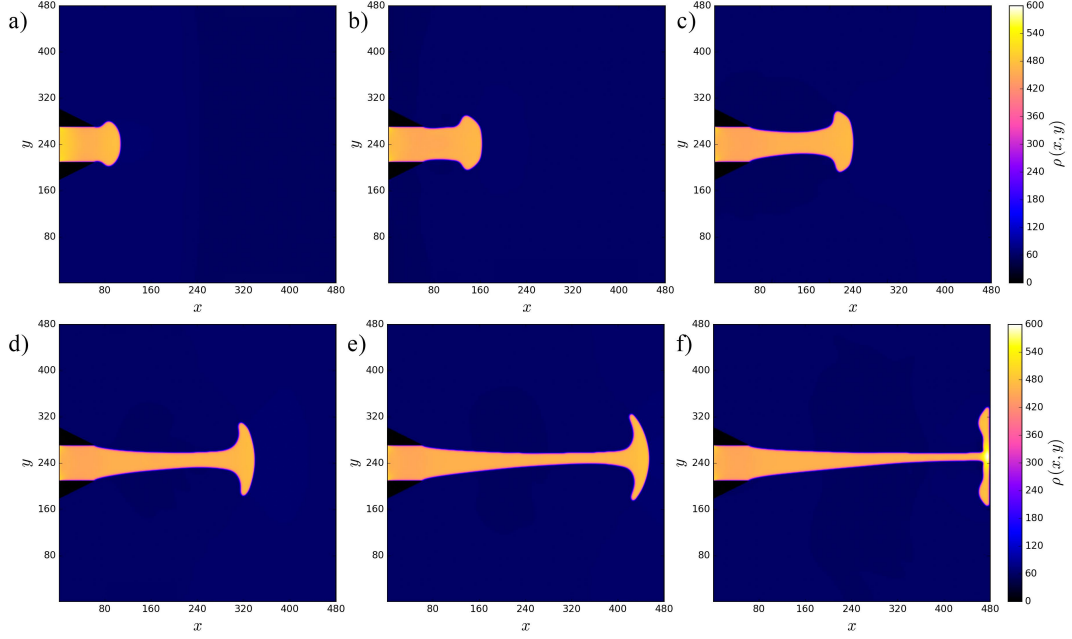


Figure 7: Series of snapshots of the fluid density for the electrospinning setup under the external electric field of magnitude 10 l.u. taken at timesteps 500 (a), 1000 (b), 1500 (c), 2000 (d), 2500 (e), and 3000 (f).

After the jet touches the collector, the jet shape fluctuates around a mean profile, providing a stationary regime. In order to characterize such regime, we also report in Fig. 8 the magnitude of the velocity field, and the LIC of the velocity field. As expected, we observe a higher value of $u(x, z)$ along the jet towards the collector, confirming what is generally observed in the experimental process.

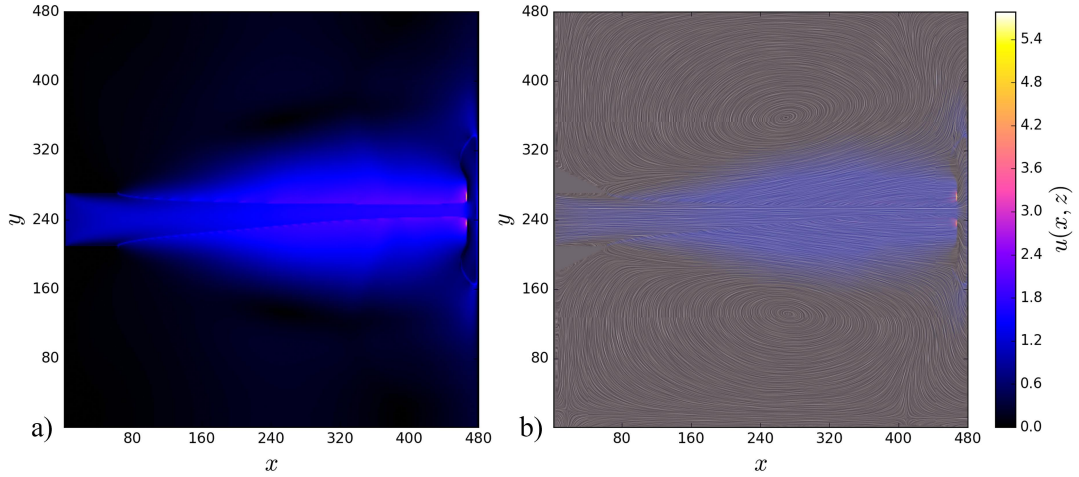


Figure 8: Velocity field magnitude (left) for the electrospinning setup at time 3000 and LIC representation of the velocity field (right panel) at the same timestep.

To the best of our knowledge, this is the first simulation of the electrospinning process within the Lattice Boltzmann methodology.

4 Summary

Summarising, we have developed a Shan-Chen model for charged multiphase fluids and provided exploratory simulations of various charged flows, namely: charged droplet at rest, charged droplet under a constant electric field and charged jet under electrospinning-like conditions. These preliminary results look promising, although more systematic numerical investigations, as well as theoretical analysis is warranted. Work along these lines is currently underway.

Acknowledgments

The research leading to these results has received funding from the European Research Council under the European Union's Seventh Framework Programme (FP/2007-2013)/ERC Grant Agreement n. 306357 ("NANO-JETS").

References

- [1] A. L. Yarin, B. Pourdeyhi, S. Ramakrishna, *Fundamentals and Applications of Micro and Nanofibers*, Cambridge University Press, 2014.
- [2] J. H. Wendorff, S. Agarwal, A. Greiner, *Electrospinning: materials, processing, and applications*, John Wiley & Sons, 2012.
- [3] D. Pisignano, *Polymer Nanofibers: Building Blocks for Nanotechnology*, Royal Society of Chemistry, 2013.
- [4] D. Li, Y. Wang, Y. Xia, *Electrospinning nanofibers as uniaxially aligned arrays and layer-by-layer stacked films*, *Adv. Mater.* (2004), 16 (4), 361-366.
- [5] A. Greiner, J. H. Wendorff, *Electrospinning: a fascinating method for the preparation of ultrathin fibers*, *Angew. Chem. Int. Ed.* (2007), 46 (30), 5670-5703.
- [6] C. P. Carroll, E. Zhmayev, V. Kalra, Y. L. Joo, *Nanofibers from electrically driven viscoelastic jets: modeling and experiments*, *Korea-Aust. Rheol. J.* (2008), 20, 153-164.
- [7] Z.-M. Huang, Y.-Z. Zhang, M. Kotaki, S. Ramakrishna, *A review on polymer nanofibers by electrospinning and their applications in nanocomposites*, *Compos. Sci. Technol.* (2003), 63 (15), 2223-2253.
- [8] L. Persano, A. Camposeo, C. Tekmen, D. Pisignano, *Industrial upscaling of electrospinning and applications of polymer nanofibers: a review*, *Macromol. Mater. Eng.* (2013), 298 (5), 504-520.
- [9] Z. Li, C. Li, D.J. Evans, *Chebyshev acceleration for SOR-like method*, *Intl. J. Computer Math.* (2005), 82, 583-593.
- [10] Z. Guo, C. Zheng, B. Shi, *Discrete lattice effects on the forcing term in the lattice Boltzmann method*, *Phys. Rev. E* (2002), 65(4), 046308.
Phys. Rev. E 2002, 65, 046308.
- [11] J. Feng, *Stretching of a straight electrically charged viscoelastic jet*, *J. Non-newton. Fluid Mech.* (2003), 116 (1), 55-70.
- [12] Darrell H Reneker, Alexander L Yarin, Hao Fong, and Sureeporn Koombhongse. *Bending instability of electrically charged liquid jets of polymer solutions in electrospinning*, *J. Appl. Phys.* (2000), 87(9), 4531-4547.
- [13] M. Lauricella, G. Pontrelli, I. Coluzza, D. Pisignano, S. Succi, *Jetspin: a specific-purpose open-source software for simulations of nanofiber electrospinning*, *Comput. Phys. Commun.* (2015), 197, 227-238.
- [14] M. Lauricella, G. Pontrelli, D. Pisignano, S. Succi, *Dynamic mesh refinement for discrete models of jet electro-hydrodynamics*, *J. Comput. Sci.* (2016), 17(2), 325-333.
- [15] M. Lauricella, D. Pisignano, S. Succi, *Three-Dimensional Model for Electrospinning Processes in Controlled Gas Counterflow*, *J. Phys. Chem. A* (2016), 120 (27), 4884-4892
- [16] M. M. Hohman, M. Shin, G. Rutledge, M. P. Brenner, *Electrospinning and electrically forced jets. I. Stability theory*, *Phys. Fluids* (2001), 13(8), 2201-2220.

- [17] M. Bernaschi, S. Melchionna, S. Succi, M. Fyta, E. Kaxiras, J. K. Sircar, MUPHY: A parallel Multi PHYsics/scale code for high performance bio-fluidic simulations, *Comput. Phys. Commun.* (2009), 180, 1495-1502.
- [18] B. Cabral, L. C. Leedom, Imaging Vector Fields Using Line Integral Convolution. *Proceedings of the 20th annual conference on Computer graphics and interactive techniques. SIGGRAPH 1993. Anaheim, California.* (1993), 263-270.